

BRING YOUR IMAGINATION TO LIGHT WITH


Light Tape[®]

Electro-LuminX[®]

www.lighttape.com

Light Tape[®]

- Continuous light for hundreds of feet with one connection.
- Dimmable
- Extremely energy efficient
- UV and moisture resistant for indoors and outdoors
- Available in lengths up to 300 feet (see footage guide)
- Highly visible through smoke
- Thinner than a credit card
- Generates no heat, cool to touch
- Easy to install and maintain

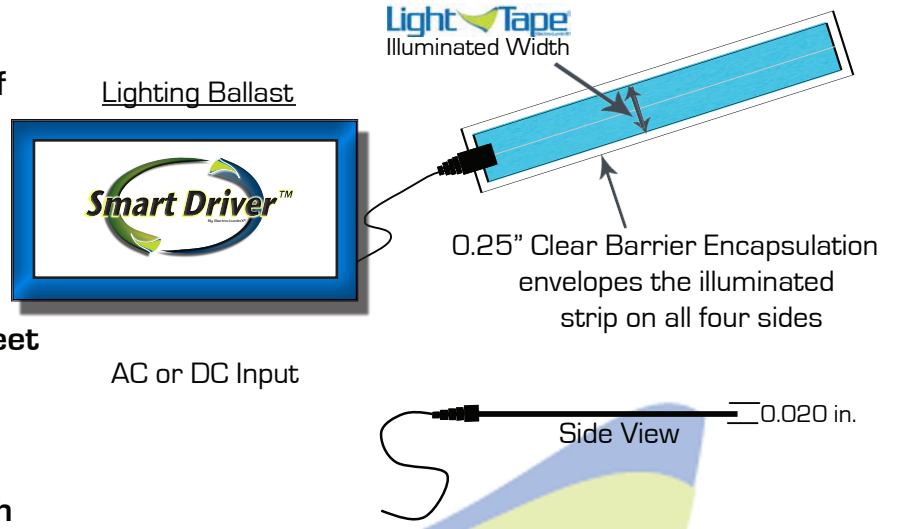

NOTE: Please see connector and lighting ballast information for further details on specifications

Honeywell



Light Tape [®] Standard Widths (In.)			
LT-025	0.25" (0.75")	LT-200	2" (2.5")
LT-050	0.5" (1")	LT-300	3" (3.5")
LT-100	1" (1.5")	LT-400	4" (4.5")
LT-150	1.5" (2")	LT-600	6" (6.5")

* Note: Illuminated Width (Finished Width After Encapsulation)

HOW TO ORDER LIGHT TAPE[®]:

When ordering, please specify: Illuminated Width, Interior or Exterior, Color, Length of Segment(s)

- Example: 1" Indoor Orange Light Tape[®] 20 feet long = LT100, INT, Orange, 1 in. @ 20 ft.

Normal Brightness Settings	27 cd/m ² (L), 125 cd/m ² (M), 200 cd/m ² (H) [candelas per meter ²]
Light Tape [®] Current Consumption	0.30 to 0.90 milliamps per inch ² depending on service hours
Light Tape [®] Power Consumption	0.2 to 1 watt per linear foot based on brightness setting
Power Source	E-LLC Smart Driver [™] Ballasts - AC or DC Input
Lamp Lifetime	Lifetime is 10,000 to 40,000 hours. See lifetime guideline on page 31