


StepGuard™ Aisle Light

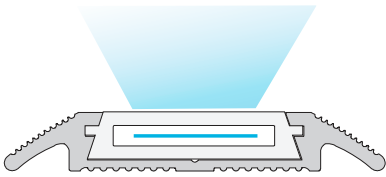

Design Features



- The StepGuard™ Aisle light profiles arrives in sections up to 3 meters in length and a continuous roll of Light Tape® inside a flexible rubber tube.
- IP65 rated to protect from spilled drinks.
- Utilizing our Snap-N-Light technology, a base channel is mounted first and then the roll of lighting inserted.
- Illuminated by one Light Tape® Electroluminescent lamp with only one electrical connection required at beginning of run with no termination at other end.
- Extremely energy efficient: 1/2 watt per meter at 1.25cm wide.
- Screwed into floor with lighting fitted into channel insert.

How to Order

- Part Number: SG-FL50
- For a basic quote, we need the total length of Light Tape® lighting per aisle that will be controlled together. We can then size the proper power supply to control your layout. It does not matter how many sections per power supply, just the total load.
- We also offer a service where we will go through architectural files to determine layout and what is required for the installation.

Rapid Installation

- Always use Heat Shrink Tubing Thin Wall, 2:1 Shrink Ratio to seal connections between profile lead and your main wiring.
- To fix profile on floor, we recommend using drywall type 10 x 1 1/4 screw with 5/16 nylon anchor every 50cms / 20 inches.




SG™ Aisle Light: One Light Tape® Lamp

The StepGuard™ Aisle lighting system is designed to be mounted on the floor and provide long linear accent lighting. A 1.25 cm wide Light Tape® electroluminescent light is utilized with continuous runs up to 20 meters with only one connection.

The SG-FL50 is a two part system with a base that is mounted directly to the floor in sections. Then, one continuous roll of Light Tape® is placed inside a flexible rubber sleeve and then inserted into the base, providing a water tight seal for the entire length.

The SG-FL50 can be dimmed to zero, and one transformer can control up to 200 meters of Light Tape®.

System and Parts

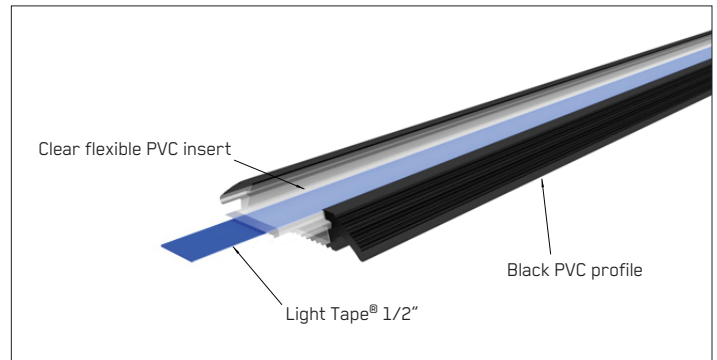


Available Colors



- No glare, completely uniform light with no heat.
- 1/2 watt and 6 milliamp per meter at 1.25cm width.
- Profile with Light Tape® is 6mm tall.


SG Aisle Light Dimensions

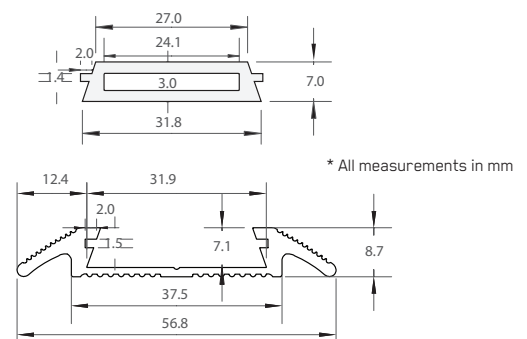


Color Options

Our base colors are Classic Natural Blue and Extreme Blue-Green. These colors appear white when off and colored when illuminated. We then add a filter to produce specific color options. All other colors will remain that color when not illuminated. Please check our website for updated and new colors.

Classic Series

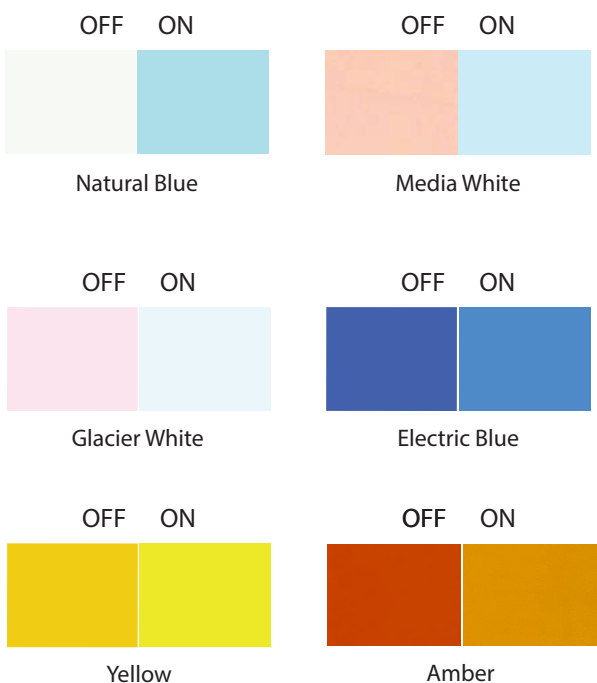


A	B	Inches
6.35mm	19.05mm	0.25



A= Illuminated width
B= Laminated width


Extreme Series

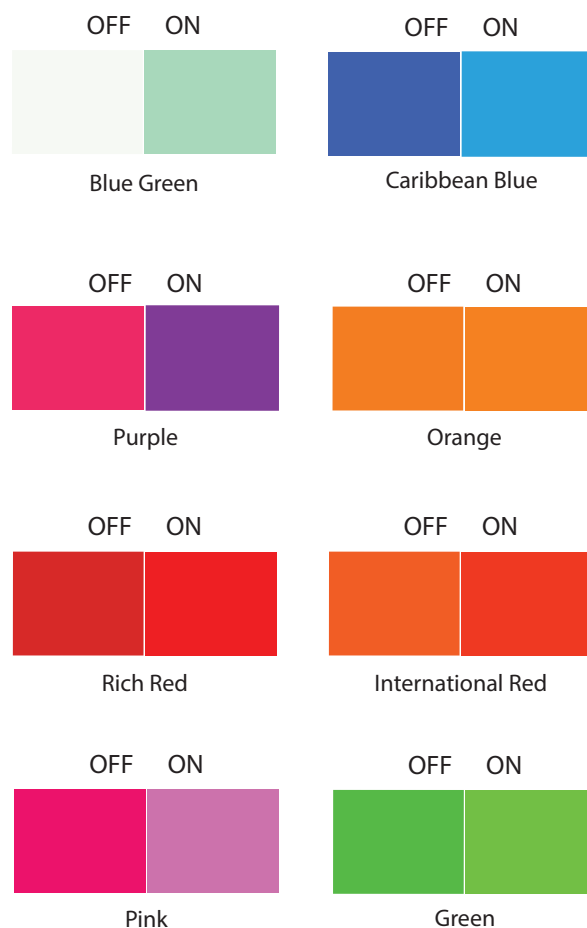

* The colors in this table are simulated and the final product may vary. If an exact color is required, we recommend seeing a physical sample. Custom colors and widths are available, but may be subject to minimum order quantities, set-up fees, and approval testing.

Digital Smart Driver™ Power Supply

Digital Smart Driver™ power supplies are specifically engineered to illuminate Light Tape®. Whether it is one segment or 80, it is possible to do it all with one Smart Driver™. There are a variety of models to choose from offering a variety of useful features. A factory representative will advise which model to use based on the total illuminated area, zones, and location.

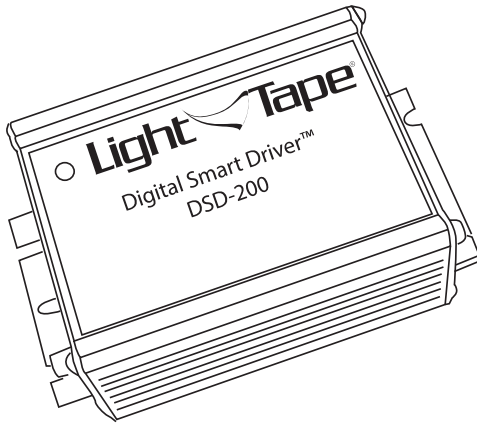

- Quiet
- Stylish compact design
- Rated input voltage 110 / 220 VAC
- Protection Class 1
- IP Degree 2x
- Worldwide voltage capacity
- Blink and Dimmer Switch
- Visual LED system status indicator
- Lightweight
- Short circuit and overload protection
- CE, UL y CSA compliant
- 0-10 dimming

Driver Ranges and Output

Driver Model	Range		Input		Output
	English System	Metric System	Amps	Watts	Max. Current, A
SD-8000	4000 - 8000 in²	25,806 - 51,612 cm²	3.50	420	3.8
BUS-DSD-4000	2000 - 4000 in²	25,806 - 51,612 cm²	3.50	420	3.8
DMX-DSD-4000	2000 - 4000 in²	12,903 - 25,806 cm²	1.5	145	2.1
DMX-DSD-2000	1000 - 2000 in²	6,451 - 12,903 cm²	1.0	110	1.2
DMX-DSD-1000	400 - 1000 in²	2,580 - 6,451 cm²	0.9	100	1.0
DMX-DSD-200	1 - 200 in²	6,5 - 1,290 cm²	0.5	12	0.15
DSD-200 D	1 - 200 in²	6,5 - 1,290 cm²	0.5	9	0.15
DSD-2000	1000 - 2000 in²	6,451 - 12,903 cm²	2.8	68	0.91
DSD-1000	400 - 1000 in²	2,580 - 6,451 cm²	0.9	97	0.32
DSD-400	200 - 400 in²	1,290 - 2,580 cm²	0.7	17	0.11
DSD-200	1 - 200 in²	6,5 - 1,290 cm²	0.5	9	0.15

*Max Vac is 320v at 750hz

Smart Driver™ Safety & Handling


It is important that you operate Light Tape® and Smart Driver Power Supplies within their parameters. Changes to parameters that result in over current will damage the Light Tape® lamp and power supplies.

- Always attach Light Tape® load before powering .
- 250 volts is mid-range and recommended set point.
- The external dimmer switch on Smart Driver™ controls the output voltage and frequency.
- Use a voltage meter to determine volts /hertz from Smart Driver™ to Light Tape®.
- Always set power supply output voltage per factory recommended setting.
Low: 200 volts | Medium: 250 volts | High: 300 volts
- We DO NOT recommend exceeding 300 volts. Contact us if the Smart Driver™ is operating outside of range .
- Red LED indicates the following :
a.Short Circuit Protection : Check wiring if light is on.
b.Overload Protection: Verify that lamp area is acceptable, or for possible damage to lamp.
- Always treat Light Tape® and Smart Driver™ with care and respect as one would with any device where electrical current is present
- Please store in appropriate NEMA enclosure for outdoor/ damp location.
- Please follow local electrical codes .

Digital Smart Driver™ Power Supply

Features

- StepGuard® is exclusively made for Light Tape®
- DMX Mode- 512 Supplies are fully DMX controllable, allowing for integration into complicated stage and light show.
- Blink Mode- Allows for on/off pulse control with fine turning knob.
- Brightness Control- luminosity adjustment to appropriately match installation environment.
- 0-10 Dimming- Optional function to remotely control Light Tape® brightness using standard 0-10v dimmers. Compatible with Lutron Dimmers.

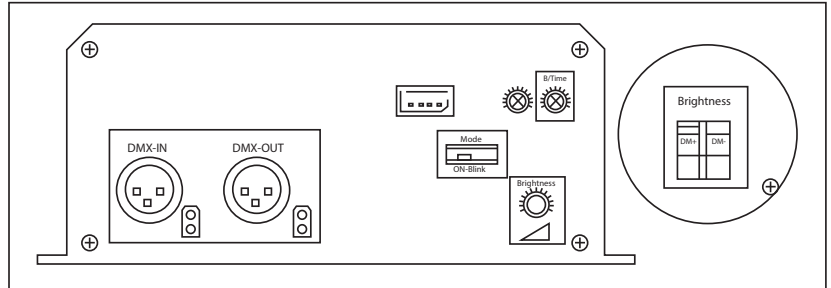

Driver Model	DMX	BLINK	BRIGHTNESS	0-10
SD-8000		X	X	
DSD 200 0-10 DIMMING			X	X
DSD 4000 DMX	X	X	X	X
DSD 1000 DMX	X	X	X	X
DSD 200 DMX	X	X	X	X
DSD 2000			X	X
DSD 1000			X	X
DSD 400			X	X
DSD 200			X	


Power Supply Dimensions

Driver Model	Length		Width		Height		Wheight
SD-8000	9 7/8 in	2.5 cm	4 3/4 in	12 cm	2 1/4 in	5.7 cm	4.15 lb
BUS-DSD 4000	8 3/4 in	22 cm	6 1/4 in	15.8 cm	3 in	7.6 cm	5.15 lb
DMX-DSD 4000	8 6/8 in	22 cm	7 1/4 in	18.5 cm	2 3/4 in	7 cm	4.9 lb
DMX-DSD 2000	8 6/8 in	22 cm	7 1/4 in	18.5 cm	2 3/4 in	7 cm	4.9 lb
DMX-DSD 1000	7 3/4 in	19.5 cm	3 3/8 in	8.5 cm	2 in	5 cm	1.85 lb
DSD 200 DMX	6 in	15.5 cm	2 5/8 in	6.75 cm	1.5 in	4 cm	0.85 lb
DSD 200 D	6 in	15.5 cm	2 5/8 in	6.75 cm	1.5 in	4 cm	0.8 lb
DSD 2000	8 3/8 in	22.5 cm	3 3/8 in	8.5 cm	2 in	5 cm	2.05 lb
DSD 1000	7 3/4 in	19.5 cm	3 3/8 in	8.5 cm	2 in	5 cm	1.85 lb
DSD 400	6 5/8 in	16.5 cm	2 5/8 in	6.75 cm	1.5 in	4 cm	1.05 lb
DSD 200	4 7/16 in	11.3 cm	2 3/4 in	7.0 cm	1 5/8 in	4.1 cm	0.70 lb

Export Packing


Features

- Sturdy Palletized Wooden Crate made of Certified Wood as per International Standard for Phytosanitary Measures (ISPM15 or NIMF15).
- Sealed with screws and secured with plastic bands and two security labels with consecutive numbering or code.
- Every box is stenciled with logos and description of content.
- Interior of crate is protected with kraft paper and bubble wrap for extra protection.
- Every Box is made to size according to customer's order.

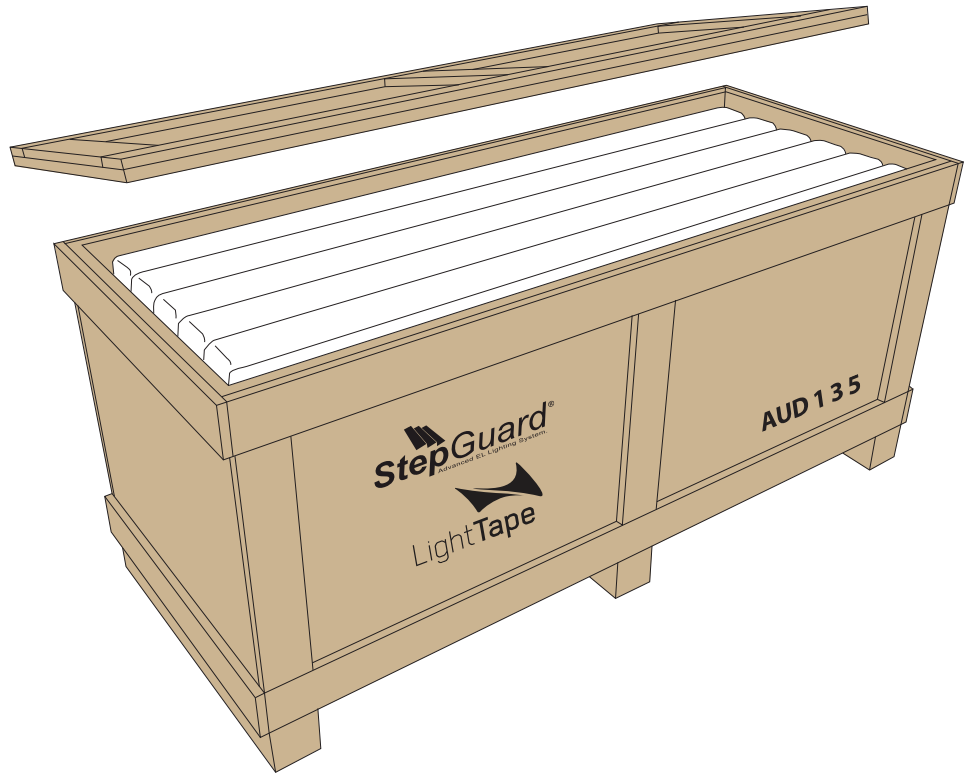


Packing Unit

Units are packed in pairs (as per detail). Box includes also Smart Drivers and spares if requested.

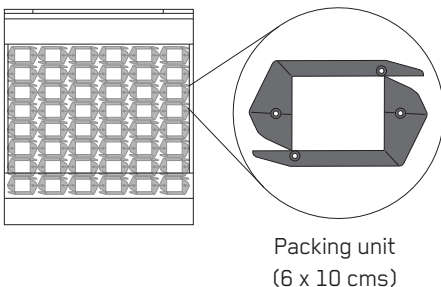


Box Dimensions

Height (front view)

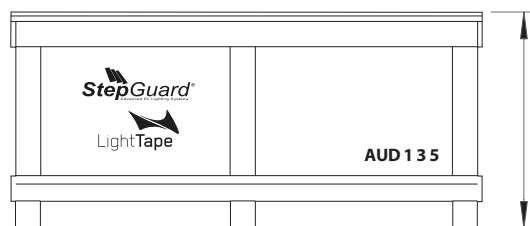


Height of box is calculated by taking the quantity of steps, divided by 12 which is the maximum quantity per row (six pairs). Then adding 6 cms to packing unit and 14cms for the skids and box wall.

Length (top view)

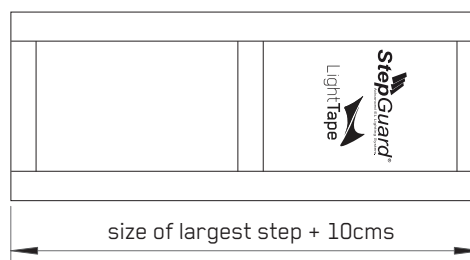

Depth (side view)




STEPGUARD[®]
INSTALLATION GUIDELINES



IMPORTANT: Do NOT kick, bend, or step on the Light Tape coil. Roll out and test the Light Tape when it's time to install, NOT before.


1

Materials

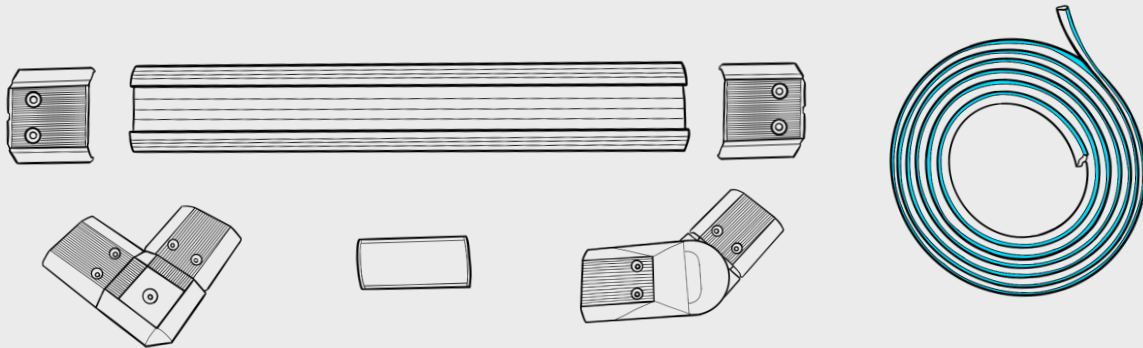

- Base channel for floor
- Plastic coil with Light Tape® inside
- End caps (standard, 90°, or variable angle)
- Small sections of rubber insert to align base channel

2

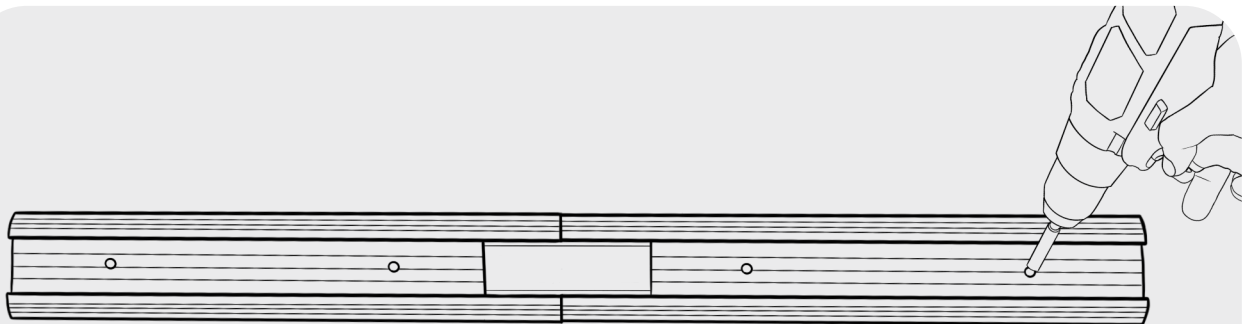

Place small coil blanks between each section to align the base channel. Drill quarter-inch pilot holes roughly every 18 inches. Remove the blanks before placing the Light Tape insert.


3



Sink 1¼ inch anchors or use glue to hold in place.


4

Prepare the Light Tape for installation

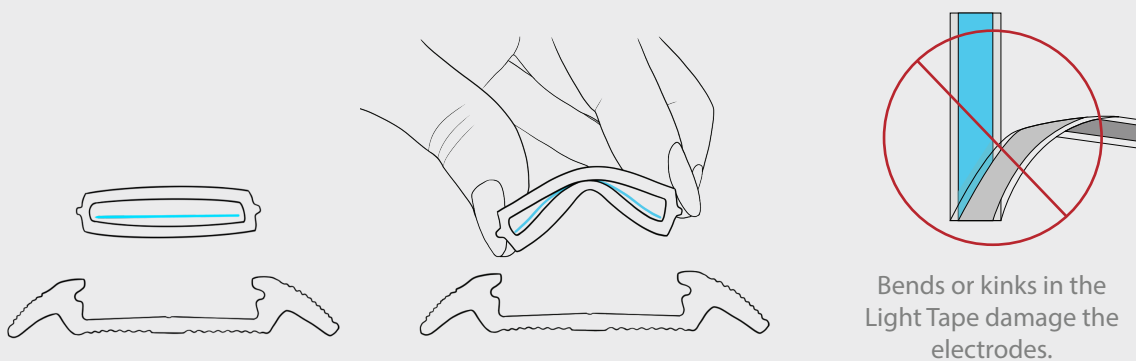


Roll out the Light Tape® coil on top of the base. Do NOT pull on the connected wires and handle with care. **Do NOT step on or bend the coil.**

5

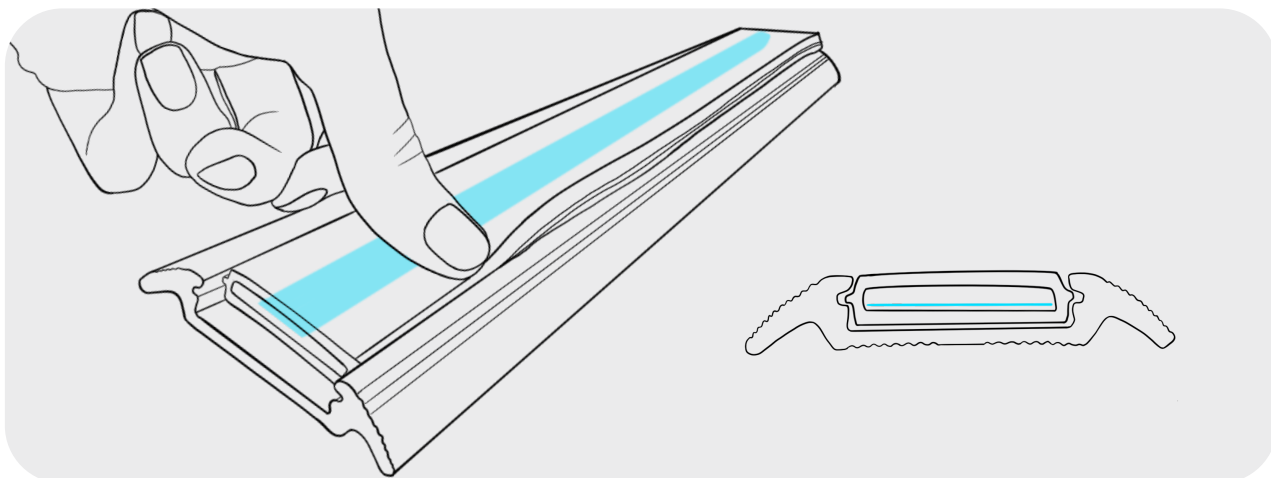

Work in rubber insert with thumb and finger to fit into the track. Rubber insert will fit flush in channel.


6

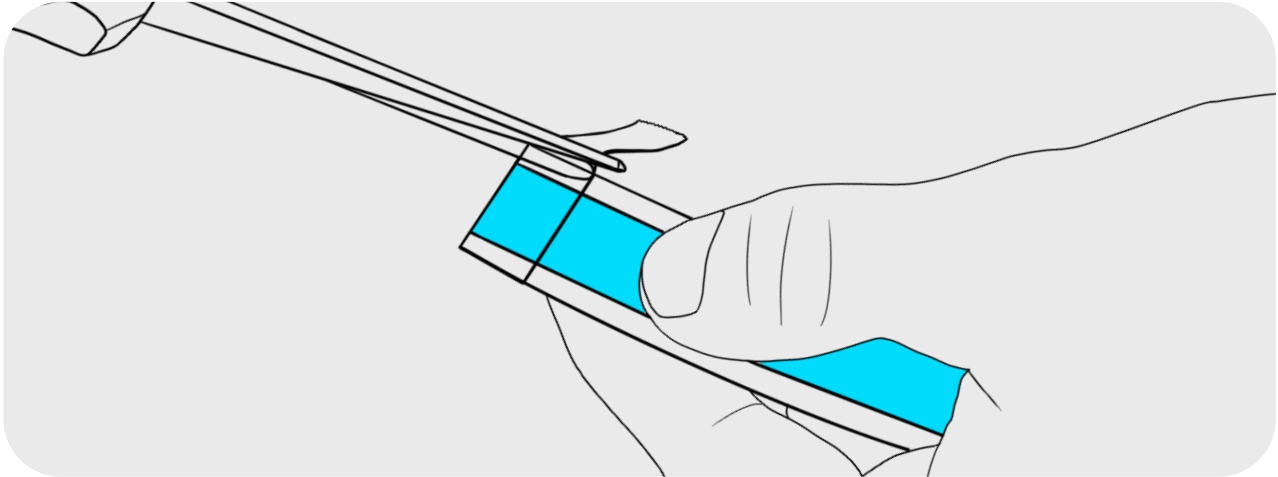

Cut the excess tape flush to the Light Tape® strip and re-insert into the insert.

7


Prepare the Light Tape for installation

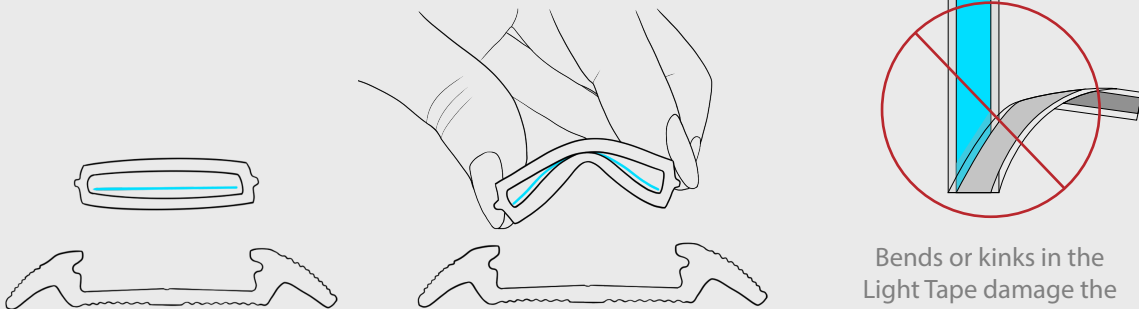

Bends or kinks in the Light Tape damage the electrodes.


Roll out the Light Tape® coil on top of the base. Do NOT pull on the connected wires and handle with care. **Do NOT step on or bend the coil.**

8

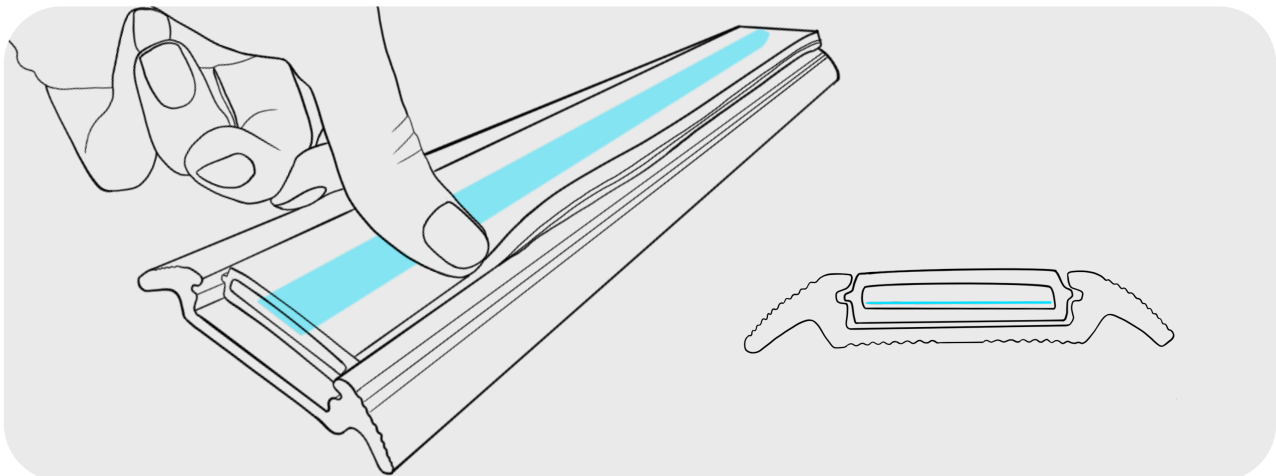


Work in rubber insert with thumb and finger to fit into the track. Rubber insert will fit flush in channel.

9

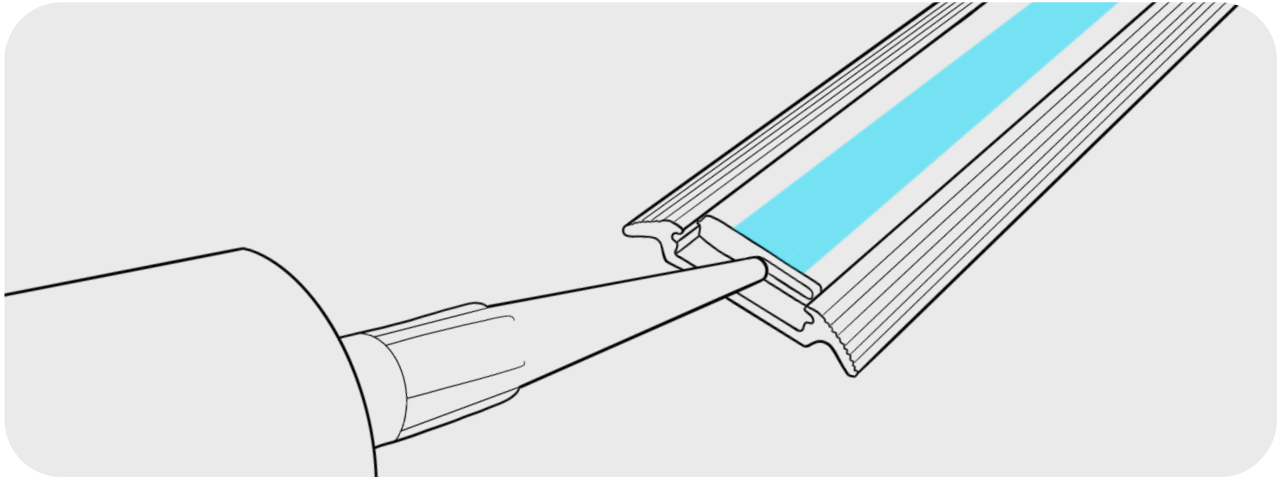


Seal the ends when insert is in channel using a waterproof sealant like ASI 55 Multi-Purpose Hybrid Sealant.

10

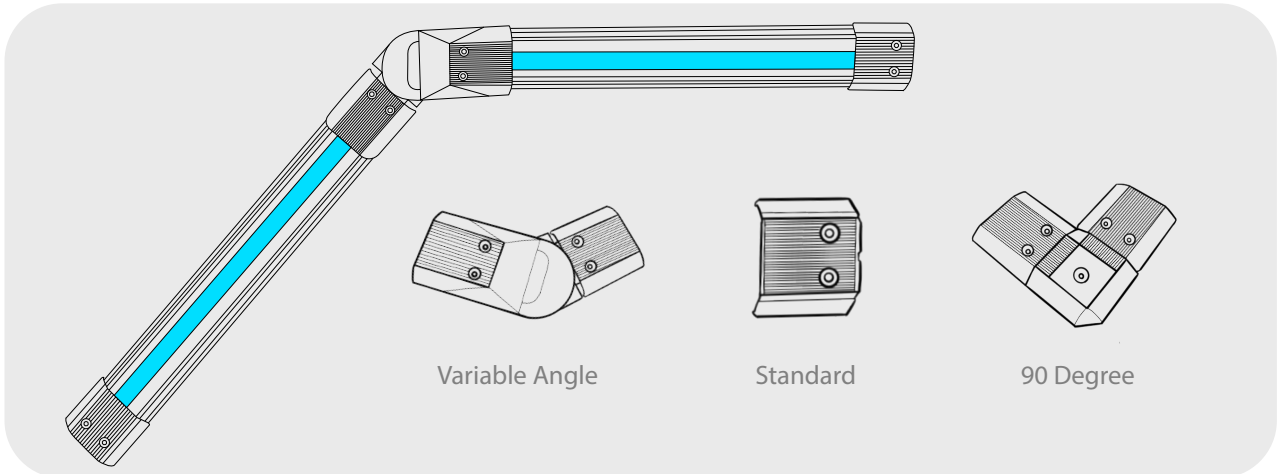


Install the necessary end caps to secure in place.

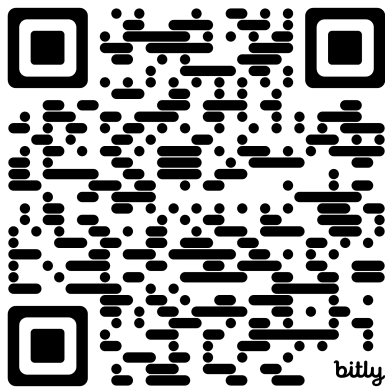

Scan the QR code for an in-depth video tutorial on StepGuard Aisle installations

StepGuard Cleaning & Maintenance Information

For external parts of StepGuard™ fixtures

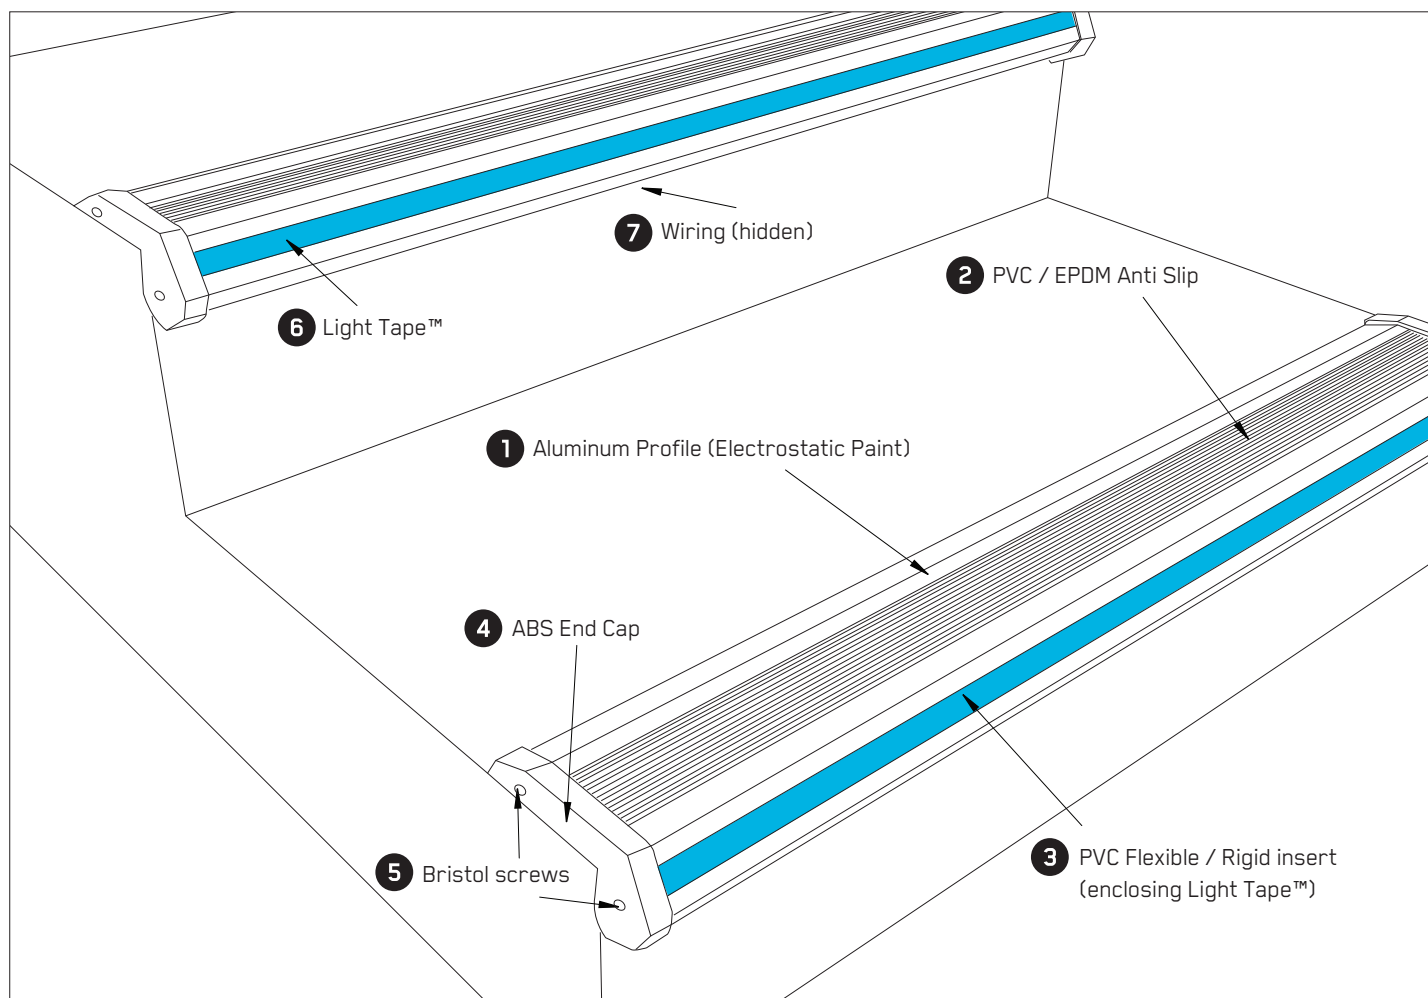

Preventive Maintenance

A visual inspection of the system should be performed regularly. Depending on use but at least once a week the maintenance and/or cleaning personnel should be able to identify that all parts are in place and working properly to run a safe system.

- 1 Aluminum Profiles**
Going down or upstairs will help to make sure all profiles are securely fixed on place. They should not move when stepping on them.
- 2 PVC / EPDM Anti-slip**
Anti-slip should be free of grease and fitted flat on its cavity from end to end.
- 3 PVC Flexible / Rigid insert**
The insert encapsulates the Light Tape™, therefore should be free of cuts or abrasions. No elements should obscure light.

StepGuard Cleaning & Maintenance Information

For external parts of StepGuard™ fixtures

4 ABS End Caps

All end caps must be properly secured to profiles with the screws. Missing, loose or broken end caps should be replaced immediately.

5 Bristol Screws (on end caps)

Both screws should be secured on each end cap. Missing screws or with signs of rust should be replaced immediately.

6 Light Tape™

Make sure Light Tape™ lights evenly on its entire length. Lights should not twinkle or blink while on. Light Tape™ should be replaced if signs of humidity, or stains are shown. Please contact Technical Department for more information.

7 Wiring

Inspect that no wires are hanging below fixture. All wiring should be hidden and secure underneath the extrusion.

General Cleaning

A regular cleaning should be performed to prevent the build up of dirt and grease, which could compromise the anti-slip properties and the general appearance of the fixture.

Avoid the use of cleaners containing hydrocarbons, bleach or citrus based agents to clean the StepGuard™ fixtures. You should also avoid the use of steam cleaners, power washers or floor sealants to clean the inserts or end caps.

FOR DAILY CLEANING

Brush down the entire fixture using a soft bristled brush and clean the insert and anti-slip using a damp cloth. Do not soak around the caps or connection or wiring areas.

Aluminum profiles

If heavier marks or sticky stains are seen, clean them using a damp cloth with aluminium safe detergent. Light surface scratches on paint can be removed using a fine wire wool and buffed with a soft cloth. Make sure as much water or cleaning solution is removed as possible.

ABS End Caps / PVC Clear inserts

Only soap and water should be used during ABS cleaning as the use of other chemicals such as chlorides, ketones and degreasers accelerates aging and give them a yellowish color. The cleaning should be done with a soft cloth or paper. Allow the system to be completely dry.

If you have any doubts or questions regarding product maintenance, please contact our Technical Department at:

Electro-LuminX Lighting Corporation

1320 North Arthur Ashe Boulevard
Richmond, Virginia 23230

1.804.355.1692
+44.7860.967410 GMT
thelighttapeteam@lighttape.com



Electro-Luminx Lighting Corporation

1320 North Arthur Ashe Boulevard
Richmond, Virginia 23230

1.804.355.1692
thelighttapeteam@lighttape.com